

HADES
DIMOUT

HADES DIMOUT FLAME RETARDANT




- WIDTH 300 cm
- WEIGHT 298 gr/m²
- COMPOSITION 100 % POLYESTER FR
- FLAME RETARDANCY M1
B1
NFPA 701
CLASSE 1 (UNO)
IMO
EN13773 CLASS 1

- SOUND ABSORPTION COEFFICIENT α_w (U = 5,8 w/m² k)
EN ISO 354 / EN ISO 11654
- g-VALUE CURTAINS & GLAZING
NBN EN 13363-1
- SOLAR REFLECTANCE : ρ_E
EN 410
- VISUAL REFLECTANCE : ρ_V
EN 410
- LIGHT FASTNESS 4 - 5 1 - 2 %
ISO 105-B02 3 / 4 1 - 2 %
- WASH FASTNESS ISO 105-C04
- DIMENSIONAL CHANGE WASHING WARP
WEFT
COMPLIANT TO REACH
- ENVIRONMENT



The above mentioned technical data are average values (± 5 %) describing the technical aspects and the chemical composition of this fabric — no warranty.

www.frcertified.com
E-mail: sales@frcertified.com
T:+32 (0)56 21 88 15

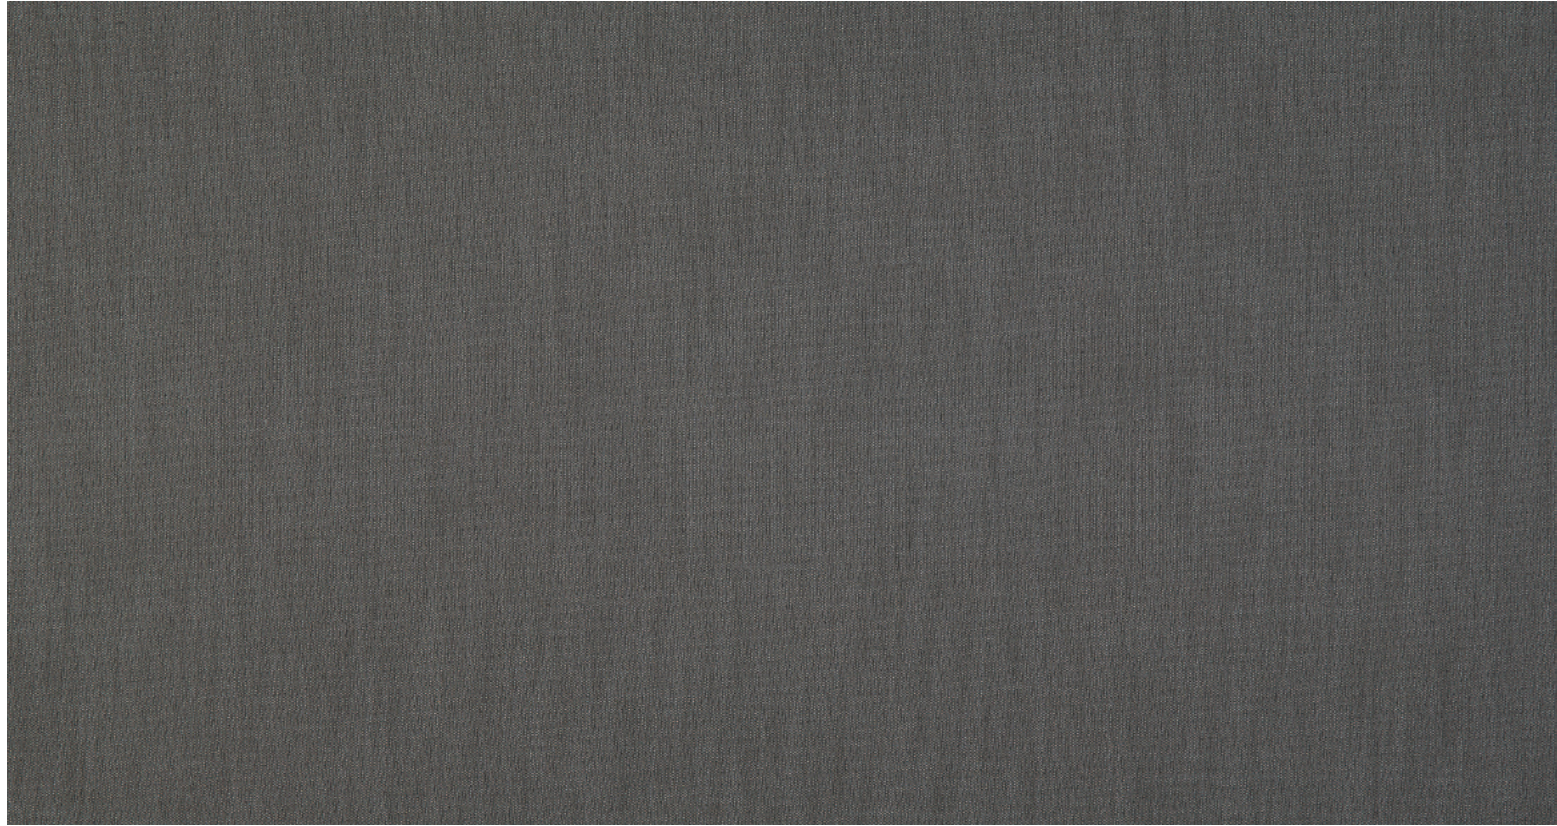

1501



1527



1528



1502




1503



1504



1505



1506



1507



1508




1509



1510



1511



1512



1513



1514



1515



1516



1517



1518



1519



1520



1521



1522



1523



1524



1525



1526